



ENGINEERED TO
PERFECTION

Website: spareomatic.com

Email: info@spareomatic.com

Phone: + 91 7983158079 | +91 8126534088

Corporate Office

SPAREOMATIC INDIA

Saraswatipuram, Ward No. 68 Miyanwala,

Raipur Road, Dehradun, Uttarakhand, 248160

Gst No: 05AETFS4681L1Z7

Workshop

Plot No. 52, New GIDC,

Umbergaon, Valsad - 396 171

Follow us    





WE SERVE WITH
BEST QUALITY
AND SERVICE FOR
UNMATCHABLE RESULTS.



ABOUT US

Spareomatic India is counted as the prominent Manufacturer & Supplier of a varied range of spare parts & equipment used in Pharmaceuticals, Chemicals, API's, Cosmetics, Agriculture, Foods and all other related industries.

We also provide the additional services & maintenance for all type of machines Pharmaceutical, API's and other related industries.

OUR VISION & MISSION

We will be recognized by our customers by achieving highest product performance standards within each area of our business through continuous improvements, backed with technology, best practices, Quality of processes, and Management systems.

WHY CUSTOMERS LOVE TO CHOOSE US?

Because Spareomatic very well understands the breakdowns are always costly and worst nightmare for every industry. So our Core competency is to solve industries spare parts supply issues with swift procurement & delivery system in every nook and corner of the country.

Spareomatic ensures complete durability and compatibility of its products; it has an upper hand over the Process Equipment manufacturing Industry. That's why we are the best source to buy spares in India at a compatible price.

You should definitely go for us because Spareomatic has:

- Wide range of products with Competitive and reasonable prices.
- Genuine, High Quality products as per Pharmaceutical GMP standards.
- Client centric approach & Ethical business practices.
- Expertise in last-mile logistics solutions with prompt delivery.
- Trustworthiness on our each product purchase with 24×7 customer support.
- Pool of dedicated and experienced professionals.

PRODUCT RANGES

GASKETS - SILICON / VITON / PTFE / EPDM

MATERIAL: SILICON | VITON | PTFE | EPDM | OEPDM INCAPSULATED

SIZE: AS PER REQUIREMENT

THICKNESS: AS PER REQUIREMENT

- INFLATABLE GASKET/TUBE FOR FBD
- GASKETS FOR SPARKLER FILTER
- D TYPE GASKET FOR BOWL SEALING
- RING GASKET
- MANHOLE GASKET
- GASKET FOR OINTMENT PLANT

TSE/BSE & MT Certificate Will be Provide



SILICON BELLOWS

MATERIAL: SILICONE

WORKING TEMPERATURE: -80°C TO 250°C

INDUSTRY: PETROCHEMICAL AND AUTOMOTIVE



HOSE PIPES & FITTINGS


TYPES: POLYESTER/ SS BRAIDED, SS CORRUGATED HOSE

MATERIAL: SILICONE/PTFE / RUBBER/ SS

SS GRADE: 304 ,316 & 316L

END FITTINGS: TIG WELDED, MECHANICAL, SOLDERED, SILVER BRAZED

LENGTH & DIA: AS PER REQUIREMENT

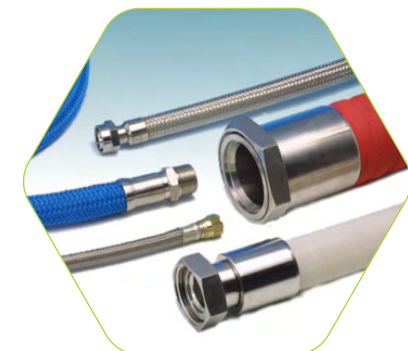

TYPES: BSP, ORFS, JIC, NPTF / NPT, SAE FLANGE

MATERIAL: SS304 ,316 & 316L

DESIGN: STRAIGHT, 90° BEND, 45° BEND, AS PER DESIGN

LENGTH & DIA: PER REQUIREMENT



FILTER BAGS - FBD / FBP / CENTRIFUGE / BASKET FILTER / PNF

ANTI-STATIC FBD BAG

BAG TYPE: ANTI STATIC / STATIC

MATERIAL: EPITROPIC CLOTH / POLYESTER COTTON SATIN / COTTON SATIN

SIZE: AS PER REQUIREMENT




CENTRIFUGE FILTER BAG

SIZE OF BAG: AS PER REQUIREMENT

MATERIAL: PP / POLYSTER / NYLON / PTFE

TYPE: ANTISTATIC / STATIC

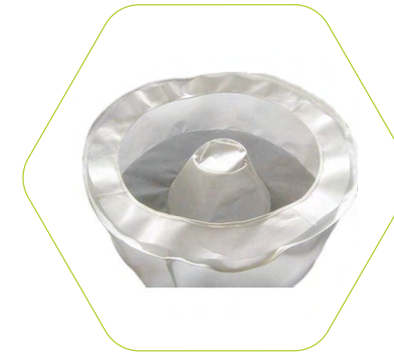

FILTER BAGS CAGES FIBERGLASS NOMEX PTFE

MATERIAL: PP / POLYSTER / NYLON / PTFE

TYPE: WOVEN / NON WOVEN / ANTISTATIC

SIZE: AS PER REQUIREMENT




FILTER PADS - SPARKLER FILTER

FILTER PAD

MATERIAL: CELLULOSE POLYPROPYLENE NON WOVEN / WOVEN

SIZES: AS PER REQUIREMENT

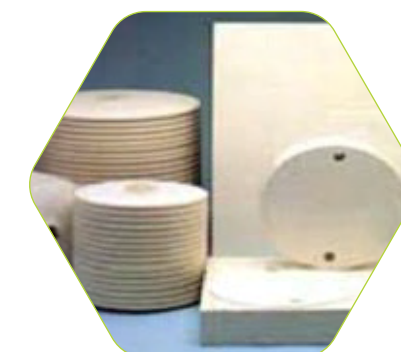

CARBON FILTER PAD

MATERIAL: CELLULOSE POLYPROPYLENE NON WOVEN / WOVEN

SIZES: AS PER REQUIREMENT



VALVES

BALL VALVES

SIZE: 1/2" TO 3"

TYPE: 2 WAY, 3 WAY

END CONNECTION: PLAIN, TC & SMS UNION

GRADE: 304 ,316 & 316L



BUTTERFLY VALVES

Size: 1" to 4"

END CONNECTION: PLAIN, TC & SMS UNION

GRADE: 304 ,316 & 316L



SOLENOID VALVE

Size: 1/2" to 3"

TYPE: 2 WAY, 3 WAY

END CONNECTION: PLAIN, TC & SMS UNION

GRADE: 304, 316 & 316L



PNEUMATIC ON OFF VALVES

SIZE: 1" TO 4"

END CONNECTION PLAIN: PLAIN, TC & SMS UNION

GRADE: 304 & 316L



DIAPHRAGM VALVES

SIZE: 1/2" TO 3"

END CONNECTION: PLAIN, TC & SMS UNION

GRADE: 316 & 316L



CONTROL VALVES

SIZE: 1/2" TO 6"

END CONNECTION: THREADED END / FLANGED END

BODY MATERIAL: SS304 & SS316L



ANGLE SEATED VALVES

SIZE: 1/2" TO 3"

END CONNECTION: THREADED END / FLANGED

BODY MATERIAL: SS304 & SS316L



MECHANICAL SEAL

TEMPERATURES: -20 C TO 300 C

SHAFT SPEEDS: UP TO 1400 RPM*

MATERIAL: SS 304 / SS 316 / HASTELLOY-B & C / ALLOY-20

FACES MATERIAL: CARBON / SILICON CARBIDE / TUNGSTEN CARBIDE

SIZES: 25MM TO 300MM



PP TRAYS

MATERIAL: POLYPROPYLENE **TEMP RESISTANCE:** UPTO 140 C

THICKNESS: 4-5 MM

SIZE: 16 X 32 X 1.25 INCH

CAPACITY: 10 KG

SIEVES / SCREEN


MULTIMILL SCREEN

MATERIAL: SS304 & SS316L

SIEVE SIZE: 4 MESH TO 150 MESH

THICKNESS: 2-10 MM

DIAMETER: 300 MM TO 1500 MM



VIBRO SHIFTER


MATERIAL GRADE: SS304 & SS316L

THICKNESS: 1MM-5MM

DIAMETER: 300MM TO 1500 MM

& AS PER REQUIREMENT

SIEVE SIZE: 4 MESH TO 150 MESH

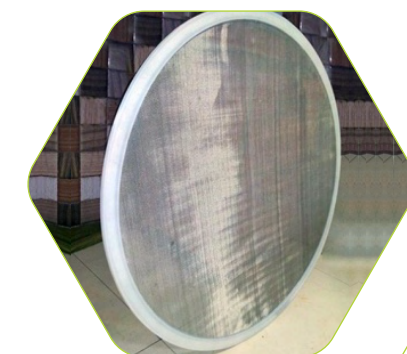

COMILL

MATERIAL: SS304 & SS316L

SIEVE SIZE: 4 MESH TO 150 MESH

THICKNESS: 2-10 MM

DIAMETER: 300 MM TO 1500 MM



ACCESSORIES

FBD HOOKS

SIZE: 6 mm
END CONNECTION: >5 mm
GRADE: SS 316



LIQUID SAMPLING VALVE
MATERIAL: SS 316L, HASTELLOY C22/C276
MAX. TEMPERATURE: 200°C
OPERATING PRESSURE (RECOMMENDED): 3 BAR
INSTALLATION: VERTICAL DOWN
REQUIRED LINE FILTER: 100 MICRON

CLAMPS



VIBRO SIFTER CLAMP
MATERIAL GRADE: SS304 / 316 / 316 L
SIZE: AS PER REQUIREMENT

TRI CLOVER CLAMP
MATERIAL: SS304 / 316 / 316L
SIZE: AS PER REQUIREMENT



SPRAY BALLS
MATERIAL: SS 316L, HASTELLOY C22/C276
MAX. TEMPERATURE: 130°C
OPERATING PRESSURE (RECOMMENDED): 3 BAR
INSTALLATION: VERTICAL DOWN
REQUIRED LINE FILTER: 100 MICRON

SPRAY NOZZLES

POWDER SAMPLING VALVE
MATERIAL: SS 316L, HASTELLOY C22/C276
MAX. TEMPERATURE: 140°C
OPERATING PRESSURE (RECOMMENDED): 3 BAR
INSTALLATION: VERTICAL DOWN
REQUIRED LINE FILTER: 100 MICRON



BINDER SPRAY NOZZLE
MATERIAL: SS 316L, HASTELLOY C22/C276
MAX. TEMPERATURE: 200°C
OPERATING PRESSURE (RECOMMENDED): 3 BAR
INSTALLATION: VERTICAL DOWN
REQUIRED LINE FILTER: 100 MICRON

SAMPLING VALVE

POWDER SAMPLING VALVE
MATERIAL: SS 316L, HASTELLOY C22/C276
MAX. TEMPERATURE: 140°C
OPERATING PRESSURE (RECOMMENDED): 3 BAR
INSTALLATION: VERTICAL DOWN
REQUIRED LINE FILTER: 100 MICRON



TABLET COATING NOZZLE FOR AUTO COATER
MATERIAL: SS 316L, HASTELLOY C22/C276
MAX. TEMPERATURE: 200°C
OPERATING PRESSURE (RECOMMENDED): 3 BAR
INSTALLATION: VERTICAL DOWN
REQUIRED LINE FILTER: 100 MICRON



PUMPS (METALLIC & NON-METTALIC)
CENTRIFUGAL / GEAR / LOBE PUMP / TRANSFER PUMP



CHEMICAL PROCESS PUMP
OPERATION MODE: AUTOMATIC
MATERIAL: SS304, SS316 ,SS 316L, HASTELLOY C22/C276
OPERATION: 50 HZ
FLOW RATES: 1-1500 M3/HR
OPERATING TEMPERATURES: -60/+300°C
OPERATING PRESSURE: UPTO 16 BAR

HORIZONTAL SELF PRIMING PUMP
MATERIAL: SS304, SS316 ,SS 316L, HASTELLOY C22/C276
OPERATION: 50 HZ
FLOW RATES: 1-120 M3/HR
OPERATING TEMPERATURES: -60/+150°C
OPERATING PRESSURE: UPTO 16 BAR



NON METALLIC INJECTION MOULDED PUMP
MATERIAL: POLYPROPYLENE | PVDF
OPERATION: 50 HZ
FLOW RATES: 1-150 M3/HR
OPERATING TEMPERATURES: -10/+80 °C
OPERATING PRESSURE: UPTO 10 BAR

NON METALLIC LINED PUMP
MATERIAL: PP/PPH/PPCP/PVDF/FEP/PFA
OPERATION: 50 HZ
FLOW RATES: 1-100 M3/HR
OPERATING TEMP.: -60/+180 °C (-75/+360°F) WITH PFA/PTFE
OPERATING PRESSURE: UPTO 16 BAR



METERING PUMP
MATERIAL: CAST IRON, SS304, SS316, SS 316L, HASTELLOY C22/C276
OPERATION: 50 HZ
FLOW RATES: 1-19 M3/HR
OPERATING TEMPERATURES: --50/+150°C
OPERATING PRESSURE: UPTO 16 BAR

HAND SANITIZER / DRYER

AUTOMATIC HAND SANITIZER
OPERATION MODE: AUTOMATIC
CAPACITY: 1100 ML
MATERIAL: STAINLESS STEEL
BRAND: DOLPHY - DSDR0113 - S
USAGE/APPLICATION: OFFICE
BATTERY POWER: 4 - AA SIZE
WITH THERMOMETER: NO



PLASTIC HAND DRYER
DIMENSION/SIZE: 240 X205 X 255MM
DRYING TIME: LESS THAN 20 SEC
NOISE LEVEL: 25 DB
MATERIAL: ABS
POWER: 1500W

SS HAND DRYER
MATERIAL: SS
AUTOMATION GRADE: AUTOMATIC
CUT OUT TIME: AUTO



ELECTRICAL COMPONENTS

CONTRACTOR
VOLTAGE TYPE: AC
VOLTAGE (V): 220
NUMBER OF POLES: 2 POLE
MINIMUM ORDER QUANTITY: 1
VOLTAGE TYPE: AC



RELAY
VOLTAGE: 12V
POWER SOURCE: ELECTRIC
RELAY TYPE: VOLTAGE RELAY
CURRENT: 30A
NUMBER OF POLES: 5
RELAY FUNCTION NORMALLY: OPEN CONTACT

SWITCHES

OPERATING VOLTAGE: 240V
SWITCH TYPE: PUSH BUTTON
SWITCH OPERATION: MANUAL
MATERIAL/BODY: ABS
PHASE: 1 - PHASE
AMBIENT TEMPERATURE: UPTO 60 DEGREE CELSIUS



ELECTRICAL HEATERS


MATERIAL: SS 304 & 316
TYPE: GMP STANDARD



SENSOR

LEVEL

LIQUIDS: ACIDS/ALKALIES/SOLVENTS/
OILS LUBRICANTS/LIQUID GASES
MATERIAL OF WETTED PARTS: SS304/SS304L/
SS316/SS316L PTFE LINED SS/PVC/PP
VISCOSITY: UPTO 250 CP
DESIGN PRESSURE: UP TO 15 KG/CM2
DENSITY/SP. GRAVITY: MINIMUM 0.6
DESIGN TEMPERATURE: UP TO 230°C
C/C DISTANCE: UP TO 5000 MM
CONNECTION: FLANGED TO ASA/BS/
DIN/TRICLOVER

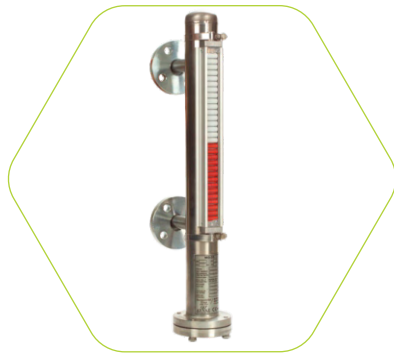

NOTE: OTHER SPECIFICATION DATA & COMPLETE PRODUCT DETAIL AVAILABLE ON REQUEST.

GAUGES

VACCUM GAUGE

MEASURING RANGE: 10-700 KG
USAGE/APPLICATION: INDUSTRIAL
MATERIAL: STEEL
CONNECTION: BOTTOM CONNECTION
DISPLAY TYPE: ANALOG
COLOR: SILVER



PRESSURE GAUGE

DIAL SIZE (MM): 65, 100, 150, 200
MOUNTING: BOTTOM / BACK
CONNECTION: 1/8", 1/4", 3/8", 1/2" NPT/BSP FLANGE/TC
CASE: SS304
MOVEMENTS: SS316
RANGE & UNIT: AS PER REQUIREMENT



NOTE: OTHER SPECIFICATION DATA & COMPLETE PRODUCT DETAIL AVAILABLE ON REQUEST.